


Typical Electrical-Optical Characteristics at Ta = 25°C, IF=20mA

Part No.	Size	Viewing Angle(deg)	Package Type	Emitting Color	Dominant Wavelength (nm)	Luminous Intensity (mcd)		Forward Voltage(V)		Package
						Min.	Typ.	Typ.	Max.	
RC-S2012RCX-XX	2.0*1.2*X	120	SMD	Red	630-645	30	300	2.0	2.4	4000
RC-S2012RCX-XX	2.0*1.2*X	120	SMD	Yellow	580-595	30	300	2.0	2.4	4000
RC-S2012RCX-XX	2.0*1.2*X	120	SMD	Green	510-530	400	600	3.2	3.4	4000
RC-S2012RCX-XX	2.0*1.2*X	120	SMD	Blue	450-480	120	200	3.2	3.4	4000
RC-S2012RCX-XX	2.0*1.2*X	120	SMD	Purel	360-420	10	30	3.4	3.8	4000
RC-S2012RCX-XX	2.0*1.2*X	120	SMD	White		400	800	3.2	3.4	4000

Outline Dimension(mm)

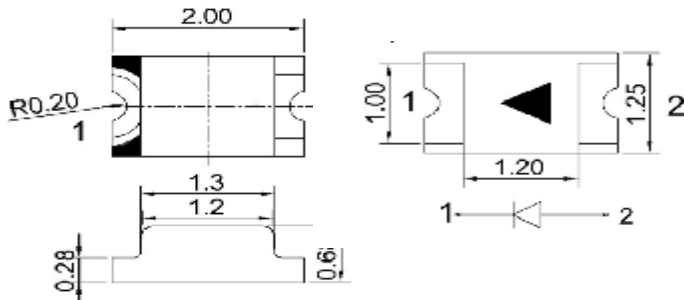

Optical-Electrical Characteristics

